



ALL WEATHER
INSULATED PANELS

INNOVATIVE.
ADAPTABLE.
ENERGY EFFICIENT.

HE40A

Product Data Sheet AdobeTexture™ Wall Panels



AdobeTexture™ wall panels offer a matte finish, multi-textured profile and finish that simulates a troweled stucco-like appearance - without the need for additional factory or field-applied stucco coatings.

FEATURES AND BENEFITS

- Proprietary breakthrough technology integrates a stucco look and texture into insulated wall panels.
- Eliminates the need for sprayed elastomeric coating applications or multi-step field-applied or additional factory-applied stucco coating.
- Matching AdobeTexture™ trim & finishing system for a clean, continuous look and feel.
- The standard interior metal surface is 26ga Imperial White.
- Same easy, economical installation as standard IMP wall panels - Arrives on site in one piece for a simple one-step installation.
- 25 yr limited paint warranty against chalking, fading and loss of adhesion.

PRODUCT PARAMETERS

Panel Thickness:			
2"	2.5"	3"	4"
Insulating Values (R):**			
16	20	24	32

Panel Width: 40"

Panel Length: from 8' to 40' maximum.

Insulation Material: CFC-free foamed-in-place polyisocyanurate foam 2.1 to 2.5 pcf density.

Joint Configuration: offset tongue and groove with concealed fastener.


Metal facings: 26ga galvanized steel

Coatings: patented AdobeTexture™ system.

Accessories: fasteners, concealed fastener clips, sealants, brake formed flashings.

AdobeTexture™ finish is available in Sandstone, Surrey Beige, Pearl Gray and Regal White only.

Available in fire 1-hour rated panel: HE40A-F (4.5" R-32)

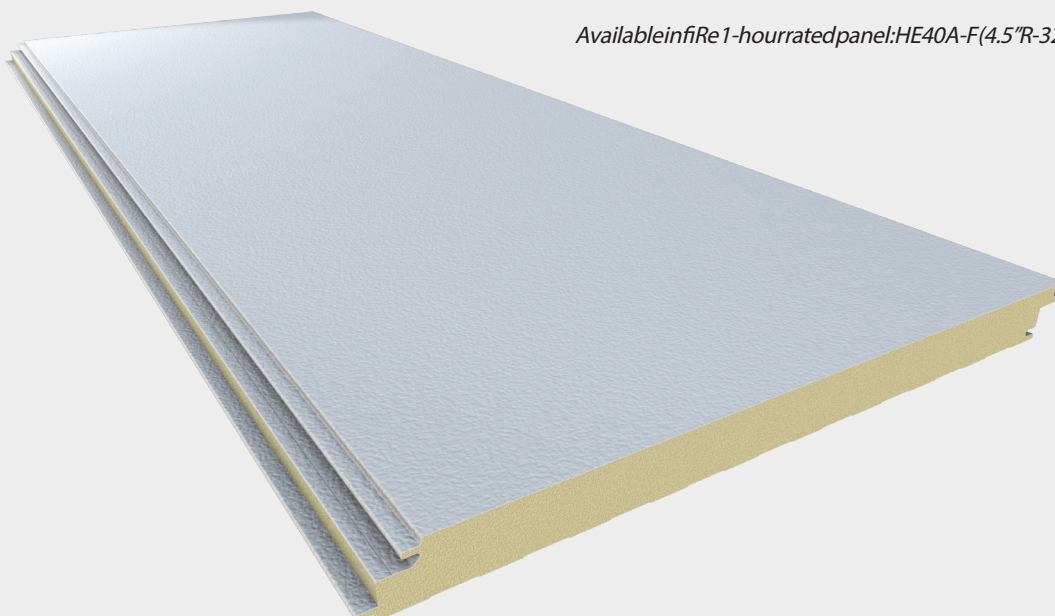

TESTED & APPROVED

All Weather Insulated Panels' products have been extensively tested under a variety of North American standards:

- FM 4880: Class 1 Fire Rating
- FM 4881: Class 1 Exterior Wall System
- CAN/ULC S101: Fire Endurance
- CAN/ULC S134: Fire Test of Exterior Wall Assemblies
- ASTM C518/C1363: Thermal Transmission
- ASTM E283: Air Infiltration
- ASTM E331: Water Penetration
- ASTM E72: Structural Strength
- ASTM E84: Flame Spread
- AAMA 501.1: Air/Water Infiltration

Miami-Dade County Product Control Approved

FLORIDA APPROVED



**R-Value tested in accordance with ASTM C518/C1363 at 40°F mean temperature, adjusted for a wind speed of 15 mph.

U.S.A

929 Aldridge Rd. Vacaville, CA 95688
15000 Panatella Pkwy Little Rock, AR 72206
1-888-970-AWIP (2947)
awipanel.com